URBAN WOOD













URBAN WOOD

colors










2


Urban Wood, available in six colors and two sizes, provides natural style in any space. The matte finish is perfect for residential locations, while the grip finish is suitable for commercial areas where rain and elements can make floors slippery.

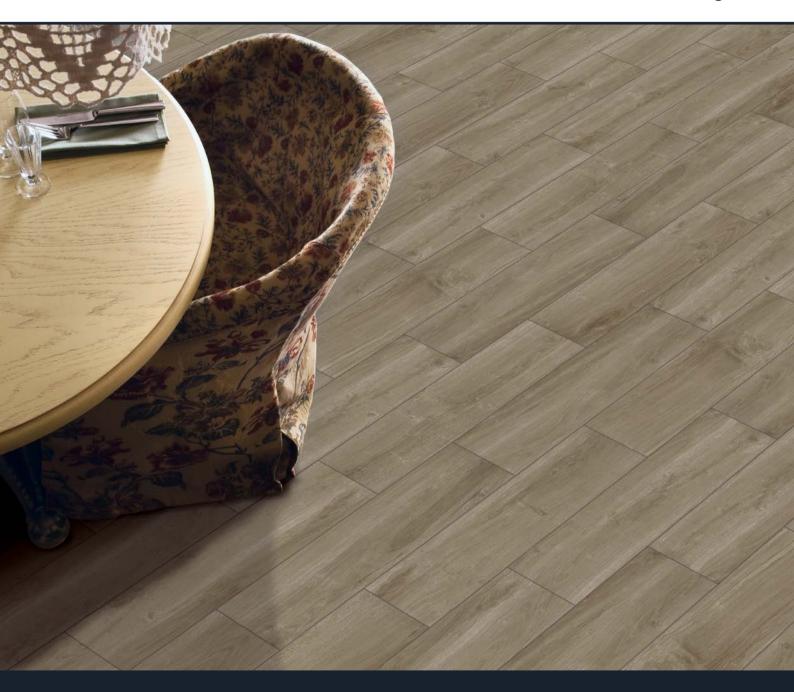

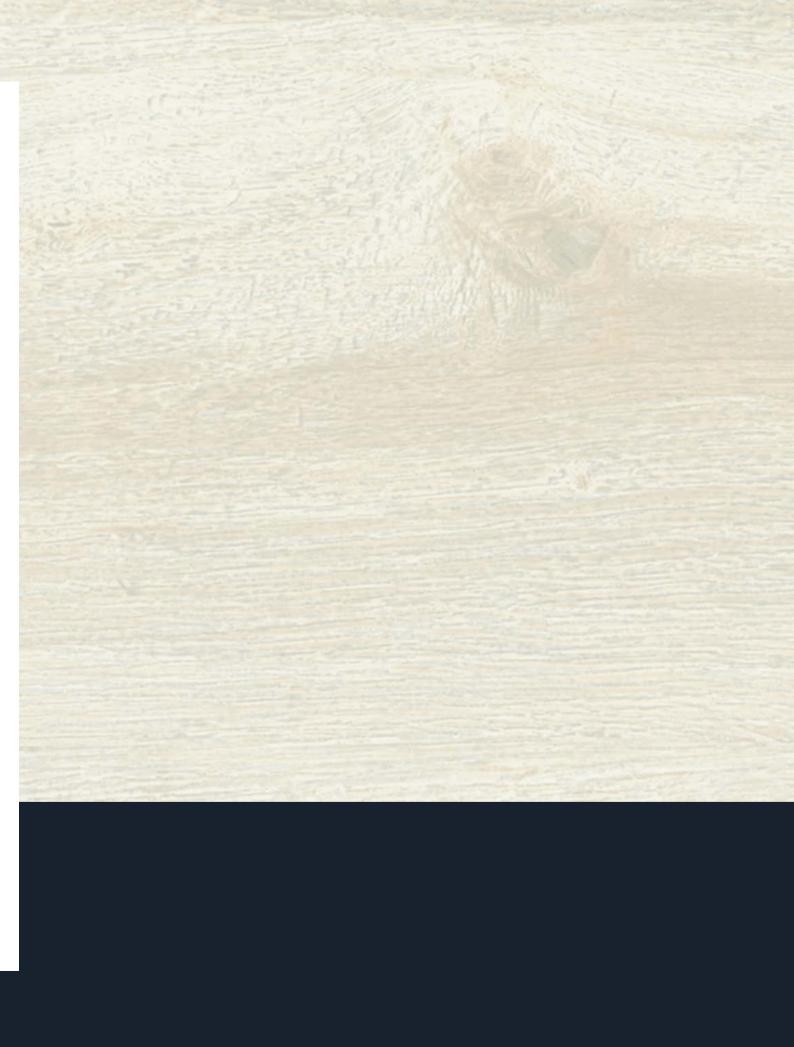


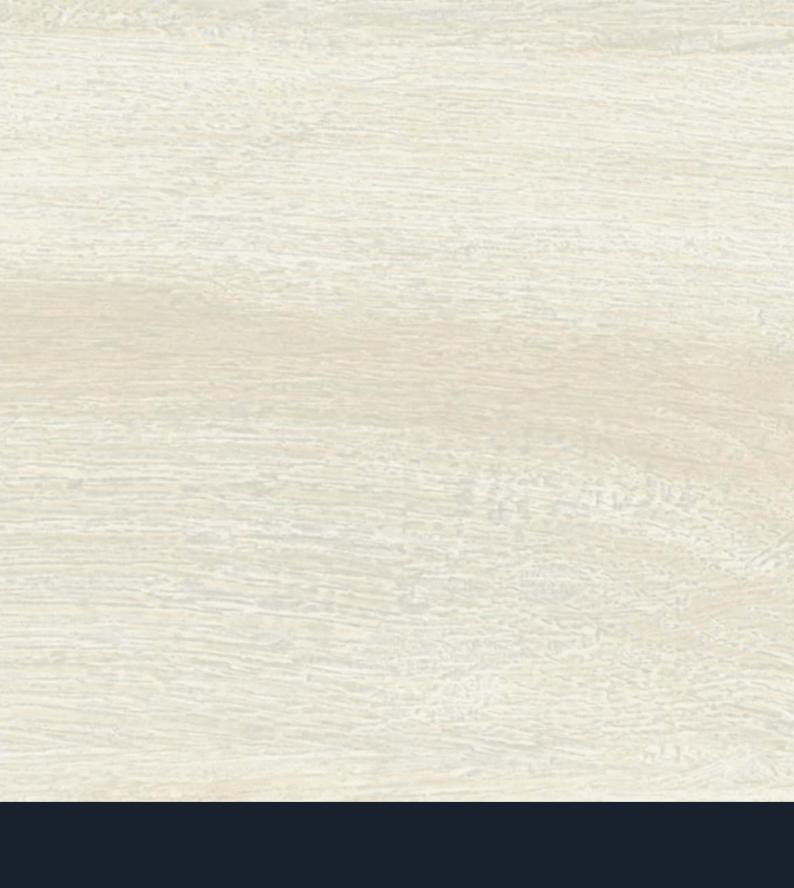

URBAN WOOD / WHITE BIRCH

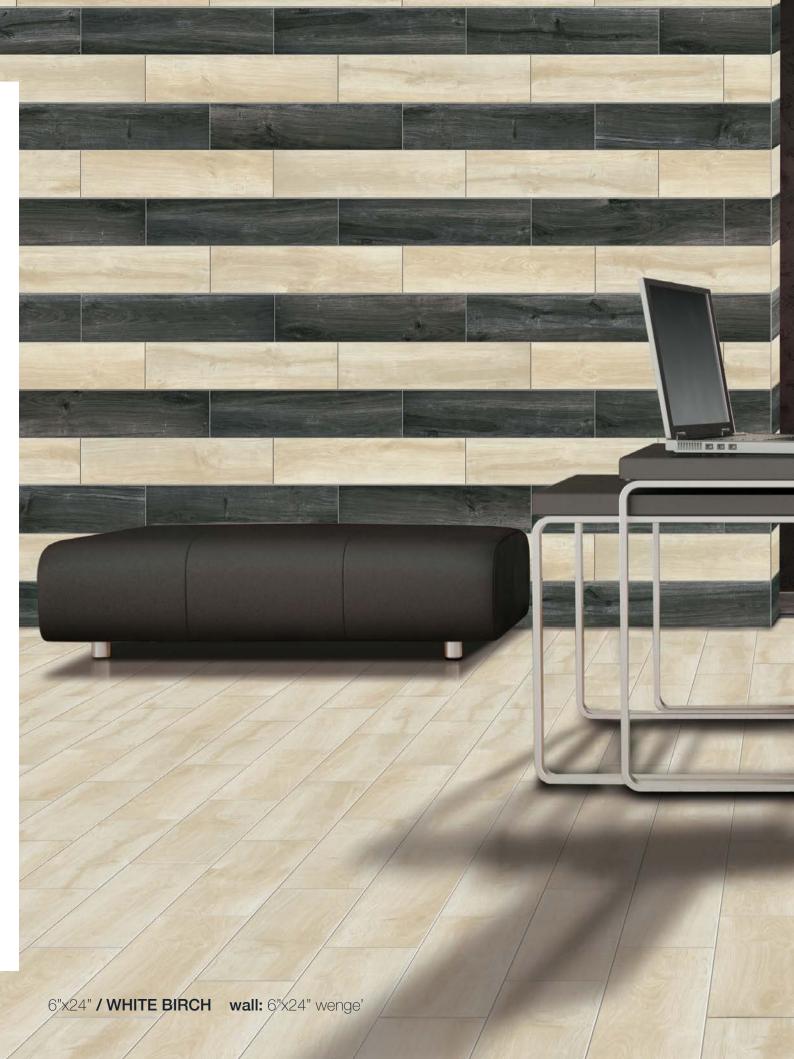



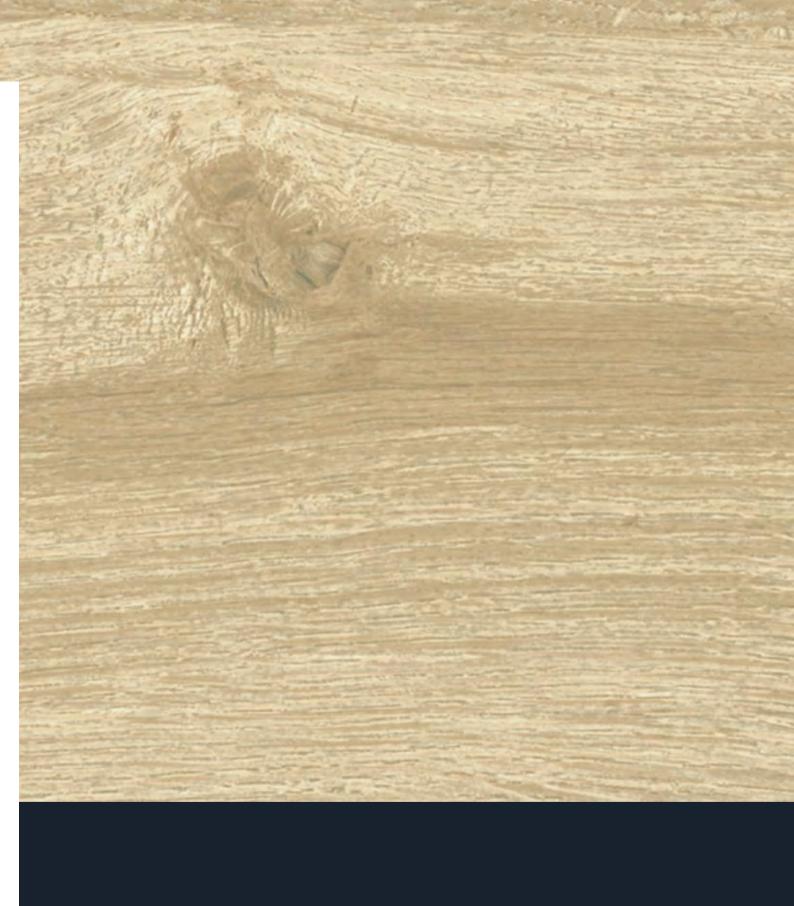




URBAN WOOD / HONEY





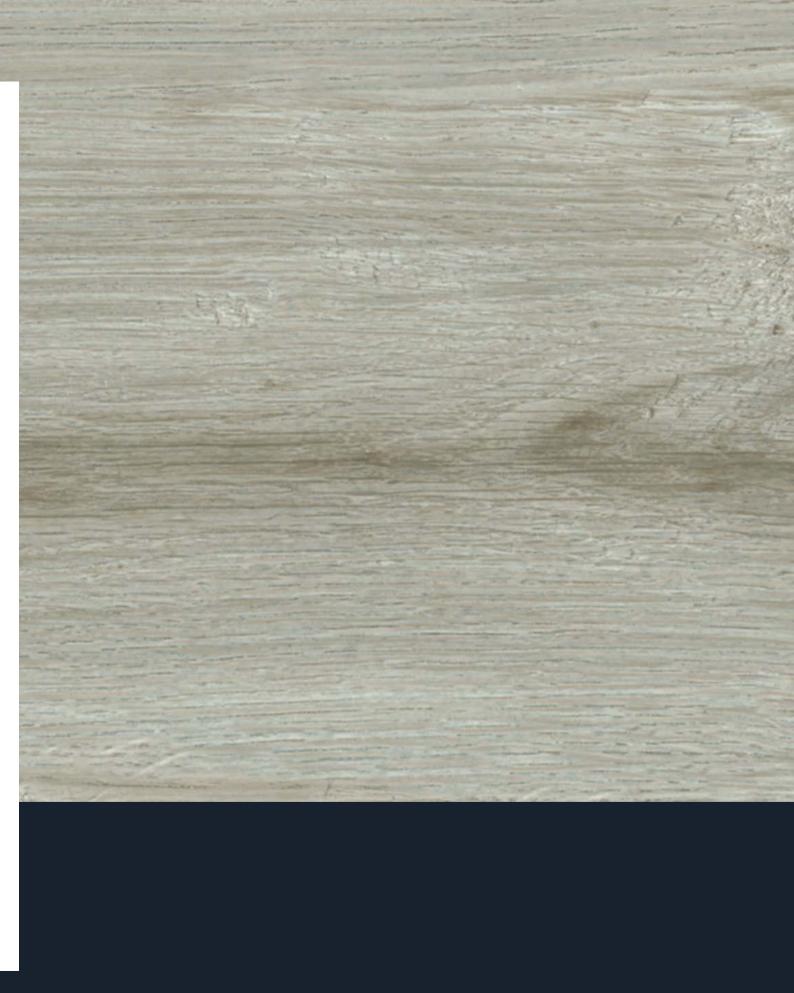




URBAN WOOD / ASH





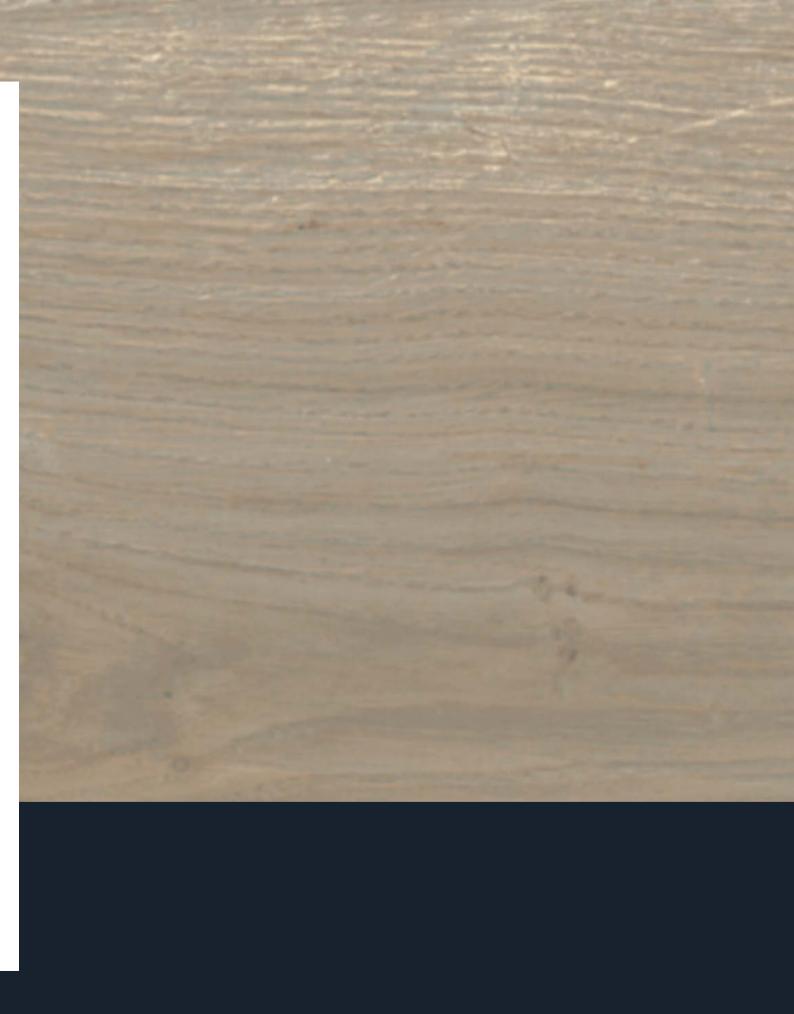




URBAN WOOD / OAK





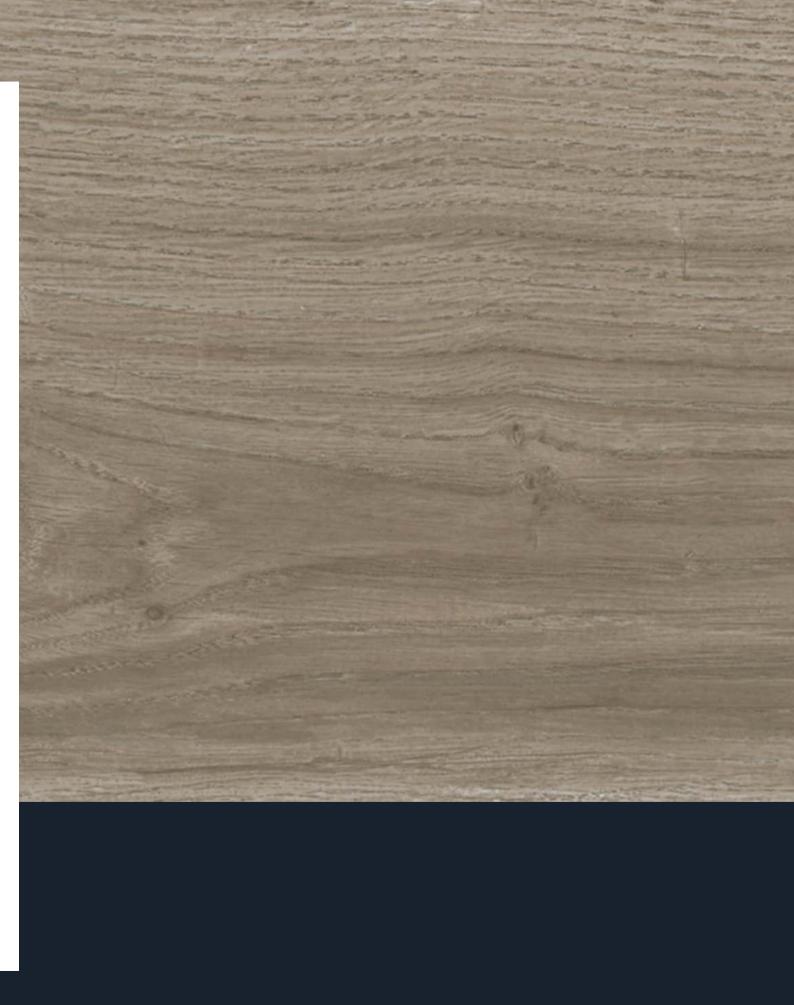




URBAN WOOD / WALNUT





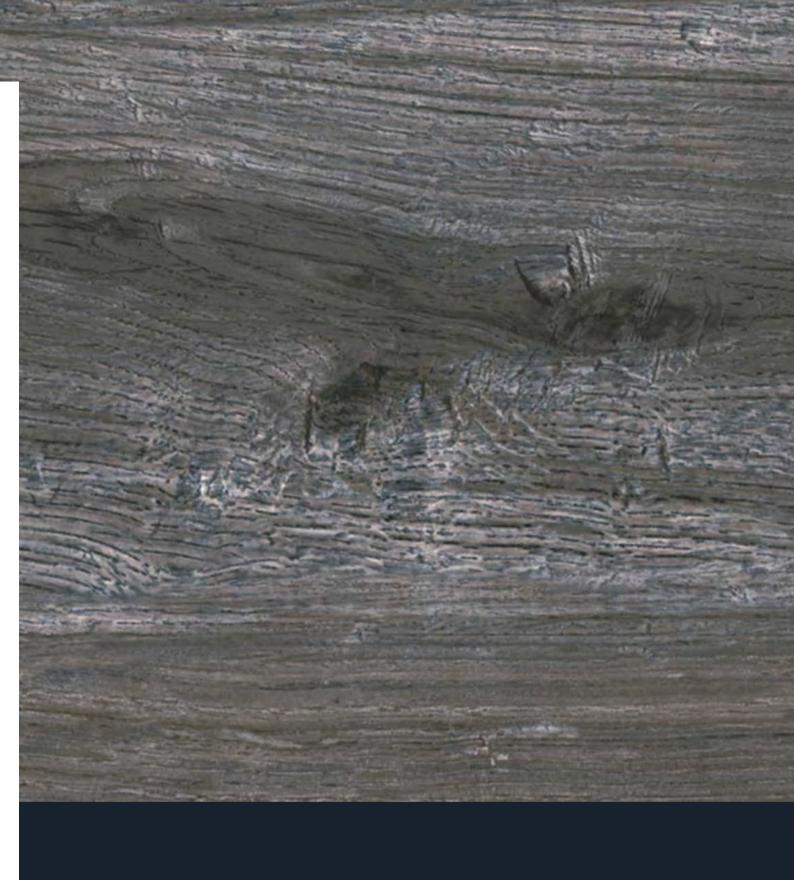



URBAN WOOD / WENGE'





sizes:

6"x24" Rectified

1095068 White Birch 1095069 Honey 1095071 Ash 1095072 Oak 1095070 Walnut 1095073 Wenge'

6"x24" Rectified Grip Finish

1095077 White Birch 1095078 Honey 1095080 Ash 1095081 Oak 1095079 Walnut 1095082 Wenge'

6"x36" Rectified

1095616 White Birch 1095617 Honey 1095619 Ash 1095620 Oak 1095618 Walnut 1095621 Wenge'

Colors shown may vary from actual product.
Final selection should be made from actual product samples.



Differences among pieces from the same production run are minimal.



Clearly distinguishable differences in texture and/ or pattern with similar colors.



MODERATE VARIATION

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece will vary significantly.



SUBSTANTIAL VARIATION

Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.



technical specifications

		REFERENCE VALUE	DECLARED VALUE	TEST METHOD		
III	SURFACE ABRASION		IV-V	ASTM C1027		
	WATER ABSORPTION	≤0.5%	MEETS REQUIREMENT	ASTM C373		
^	CHEMICAL RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM 650		
*	DYNAMIC COEFFICIENT OF FRICTION	≥0.42 WET	MEETS REQUIREMENT	ANSI A137.1		
*	STAIN RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM C1378		
۵	BREAKING STRENGTH		≥400	ASTM C648		
*	RESISTANCE TO FREEZE		RESISTANT	ASTM C1026		



RESISTANT FOR THE HOUSE The product is water-resistant: it stops liquids, body oils, acidic and staining substances from penetrating the tiles. It resists scratches, scuffs and gauges better than any other floor covering. It does not absorb furnes, odors or smoke. It doesnt discolor or fade when exposed to sunlight, or other natural elements. It is completely fire proof. It resists burns and doesn's feed a fire. Its high resistance to abrasive dirt and grime makes it suitable even for heavy-traffic areas of the house such as hallways, entrances, foyers and walkways.

FROST RESISTANT Exceeding the ADA standard requirements, the Milestone

product can also be used for outside applications. It stands up to abrupt temperature changes and freezing-thaw cycles. When properly installed according to ANSI A137.1. It's strong enough to be used in exterior applications even in frigid climates. Proper consideration must be given to the anti-slip requirements of the area to be tiled.

ANTI-SLIP The testing conducted on our finished product will guarantee that all of our tiles will have an anti-slip surface so they may be used with total confidence in kitchen and bath applications. The Milestone product is perfect for both home and commercial interiors, such as restaurants, offices, retail stores, etc. Its anti-slip properties provide a safe walkking surface in both wet and dry conditions, according to the Americans with

HYGIENE/SANATATION & EASY CLEANING The Millestone product doesn't absorb odors or bacteria of any kind. It's easy to clean with a dampsponge, mop, or cloth. For a more intense cleaning, simply use a mild solution of water and a common household detergent. Regular cleaning will stop the growth of germs and bacteria in damp areas such as the bathroom.

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

packaging

SIZES	METRIC (CM)	THICKNESS (MM)	PIECES PER BOX	UOM PER BOX	WEIGHT PER BOX	BOXES PER PALLET	UOM PER PALLET	WEIGHT PER PALLET*
FIELD TILES								
6"x24" RECTIFIED	15x60	10 mm	12	12 SF	52.8	48	576 SF	2,534
6"x24" RECTIFIED GRIP FINISH	15x60	10 mm	12	12 SF	52.8	48	576 SF	2,534
6"x36" RECTIFIED	15x90	10 mm	8	12 SF	52.8	48	576 SF	2,534

* WEIGHT PER PALLET DOES NOT INCLUDE PALLET WEIGHT ITSELF.
ALL OTHER SIZES WILL BE PACKAGED AS ORDERED.
PLEASE CONTACT MILESTONE CUSTOMER SERVICE AT 1-877-356-7461 FOR PACKAGING INFORMATION.

MINIMUM GROUT SIZE RECOMMENDED = 5 MM (OR APPROX. 3/16") IF STAGGERED TILE PLACEMENT, WE RECOMMEND USING A 30% OFFSET. IF SPECIFIED BRICK PATTERN WITH 1/2 PATTERN MANDATORY, A BIGGER GROUT IS RECOMMENDED TO HIDE IMPERFECTIONS OF INSTALLATION (MINIMUM 1/4").

Routine care instructions:

- 1. Wash with water to remove superficial dirt. 2. Application of Fila Cleaner® Fila (commercial product) diluted to an average of 1:200 to the surface. 3. Let the solution sit 5-7 minutes.
 - 4. Remove the cleaner with a vigorous mechanical cleaning action using common hand cleaning equipment, or a suitable floor-cleaning appliance.

5. Dry the floor completely.

CLEANING & MAINTENANCE

Note: For desired results, it is particularly important to combine the effect of the detergent with a vigorous mechanical cleaning action.

The products mentioned in these instructions do not officiate any official agreements with any floor cleaning product producers.





















PROGRESS THAT TOUCHES AND INVESTS IN THE ENTIRE SOCIETY

As a active member of the U.S Green Building Council, Milestone spreads awareness to the entire American communities and encourages towards the use of building solutions inspired by environmentally friendly practices. Using Milestone products for project implementation, will positively contribute in obtaining scores and points required for earning the LEED certification

(Leadership in Energy and Environmental Design).

A COMMITMENT TO THE DEVELOPMENT OF PRODUCTS FOR A CONSCIOUS BUILDING TRADE

Milestone offers products containing recycled material. The adoption of eco-compatible production systems is merit of Italian designs produced in the U.S.

TECHNICAL DEVELOPMENT THAT CONSIDERS THE NATURAL ENVIRONMENT

Milestone commits to the eco-compatible project and translates the same into an avant-guard production process, minimizing the negative impact on the environment.

WHY PORCELAIN?

There are many reasons to choose impervious porcelain tile over other floor coverings. It offers the largest array of design options and holds its value the longest. In a comparison between the many different flooring options, porcelain tile offers one of the most durable and least expensive options over the lifespan of the building.

Benefits of Porcelain Tile

- Impervious to water
- Easy to maintain
- Variety of design options
- Environmentally friendly
- Resistant to germs and bacteria
- Fade resistant
- Fire resistant
- Durable best long-term value vs. other floor coverings

SUGGESTED INSTALLATIONS

PEI Class



Moderate to heavy foot traffic

Recommended for all residential applications as well as medium commercial and light institutional applications.

PEI Class



Heavy traffic

In the presence of scratching dirt, in the most severe conditions to which glazed surfaces can be exposed (entryways, work areas, restaurants, exhibitions, shops, and other environments in public or private buildings, and more)





300 International Blvd. Clarksville, TN 37040 | www.milestonetiles.com | 1-877-356-7461

